

OTO 4 LINE

For wires mm 1,40- 8,00 to be coated with zinc, nickel, copper, tin,
new electro zinc-nickel alloy




Mod.OTO 5 and OTO 5 RT 18

- » speed up to 400 mtm
- » rectifiers 2000-4000-7000-10000 amp
- » pay-off, double electro cleaning, electro plating, finishing, take - up spools or coils
- » coat weight up to 25 micron, high speed deposition
- » electronic control of galvanic parameters and wire tension
- » for wire mesh - nails-plastic coated wire-forming - bending

» bright zinc blu passivated



Accumulating device

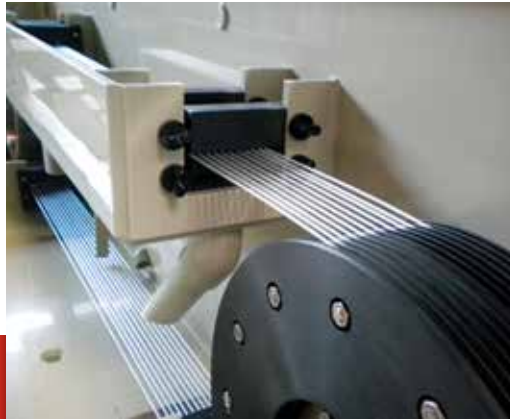

Nickel plated



OTO 4 XL up to 8 mm



Round - flat wire heavy electro coated

- » for cable armouring
- » sizes mm. 14 - 8,0 round wire
- » mm. 0,1-1,10 thick mm. 2,0 - 20,0 width



Zinc and polishing die block



- » Mod. OTO 4 VE "U" SHAPE
- » HIGH SPEED mod.OT4 LINE CU



//////
 phone int. +39 0341 660246-7-8
 fax int. +39 0341 660249
 www.otomec.it
 E-mail: info@otomec.it